


	55XE4F	49XE4F	
PANEL	Screen Size	55	49
	Panel Technology	IPS, M+ (WRGB)	IPS, M+ (WRGB)
	Back Light Type	Direct	Direct
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 x 1,080 (FHD, WRGB)	1,920 x 1,080 (FHD, WRGB)
	Brightness	4,000 cd/m ² (Typ.), 3,200 cd/m ² (Min.)	4,000 cd/m ² (Typ.), 3,200 cd/m ² (Min.)
	Contrast Ratio	1,200:1	1,300:1
	Dynamic CR	500,000:1	500,000:1
	Viewing Angle (H x V)	178 x 178	178 x 178
	Response Time	Typ. 9ms (G to G BW)	Typ. 8ms (G to G BW)
	Surface Treatment (Haze, Quarter Wave Plate)	Haze 3%, QWP	Haze 3%, QWP
	Local dimming	48 Blocks	48 Blocks
	Life Time (Typ.)	50,000 Hrs	50,000 Hrs
	Operation Hours	24 Hrs	24 Hrs
	Orientation	Portrait & Landscape	Portrait & Landscape
CONNECTIVITY	Input	HDMI (2), DP, HDBaseT, USB (2)	
	Output	External Speaker Out (L/R)	
	External Control	RS232C In/Out, RJ45 (LAN) In/Out	
PHYSICAL SPECIFICATION	Protection Glass	5mm (IK 10, Degree of Protection, Tempered, Anti-Reflective)	5mm (IK 10, Degree of Protection, Tempered, Anti-Reflective)
	Bezel Color	Black	Black
	Bezel Width	38.4mm (T/B), 26.0mm (L/R)	38.4mm (T/B), 26.0mm (L/R)
	Monitor Dimension (W x H x D)	737.4 x 1,292.5 x 88.0mm	656.2 x 1153x 88.0mm
	Weight (Head)	40kg	32Kg (TBD)
	Packing Dimensions (W x H x D)	1,446 x 890 x 207 mm	1,286 x 797 x 207mm
	Packed Weight	45kg	37Kg (TBD)
Handle	X	X	
KEY FEATURE	webOS4.0 Platform, Internal Memory (16G, System 4GB+ Available 12GB), Temperature Sensor, Auto Brightness sensor, BLU Sensor, Pixel sensor, Gyro Sensor, Humidity Sensor, Outdoor API control, HDBaseT, WOL, webRTC, Control Manager, DPM, Smart Energy Saving		
ENVIRONMENT CONDITIONS	Operation Temperature	-30°C to 50 °C	-30°C to 50 °C
	Operation Humidity	5 % to 100 %	5 % to 100 %
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
POWER CONSUMPTION	Typ./Max.	310/390W	290/370W
	Smart Energy Saving	170W	170W
CERTIFICATION	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC
	ErP / Energy Star	ErP "C" / NA	ErP "C" / NA
SOFTWARE COMPATIBILITY	SuperSign	Yes (CMS, Control)	Yes (CMS, Control)
	Signage365Care	Yes	Yes
ACCESSORY	Basic	Remote Controller, Manual (EIG, IG, OM), Regulation Book, Phone to RS232C Gender, HDMI Cable, POWER CABLE, Battery	

Connessioni


55XE4F / 49XE4F



- 1 SPEAKER OUT
- 2 HDMI IN
- 3 RS232C IN
- 4 RS232C OUT
- 5 DP IN
- 6 USB IN
- 7 LAN IN
- 8 LAN OUT
- 9 HDBaseT IN

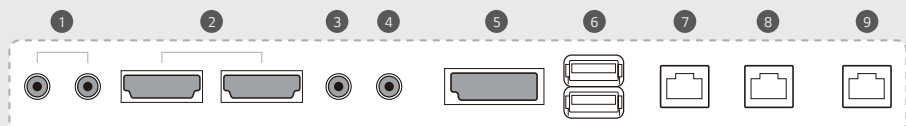

55"

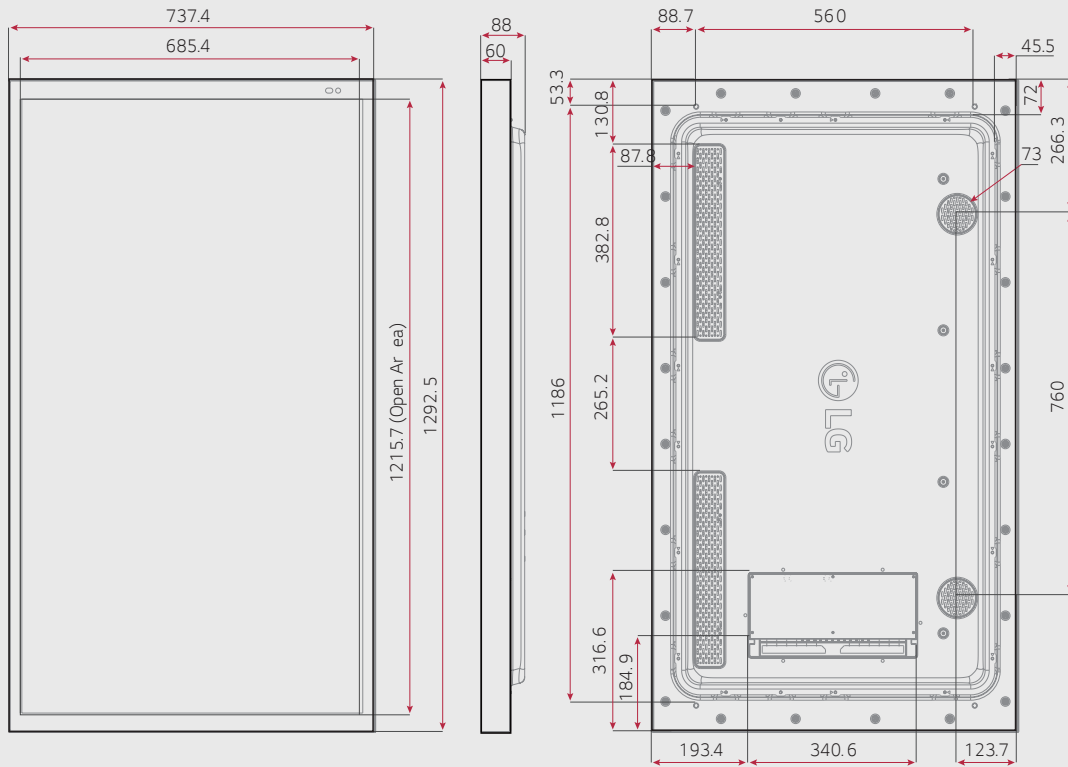

49"

